







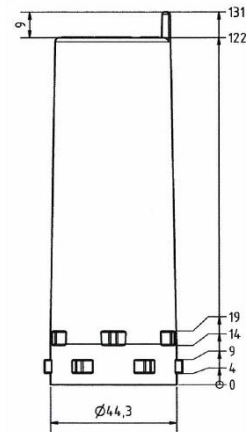
**fiX-E**

strain relief – waterproof – transparent

**The better junction box** for industrial purposes, plant construction, equipment installation, dry wall, light weight and prefab construction, for dropped ceilings, furniture and for outdoor installation.

**Usage:** remove the cable sheath (50 - 70 mm). Open the cable holes in the sleeve using the supplied punch or a pick tool for thinner cables. Push one cable through each opening. The sleeve will hold the cable to simplify the connecting. After the cables are connected, slide the clear plastic cover over the sleeve and secure with the supplied cable tie. Be sure to follow the safety instructions for working on electrical equipment. Usage only by professional personnel.

Typ 315	Typ 525
CE H RoHS IP54/IP65* 400V 1,5 - 2,5mm <sup>2</sup>	
4 kabel 3 x 1,5 mm <sup>2</sup> to 4 kabel 5 x 1,5 mm <sup>2</sup> + 1 device- or light connection	3 kabel 3 x 1,5 mm <sup>2</sup> to 3 kabel 5 x 2,5 mm <sup>2</sup> + 1 device- or light connection
All measurements in mm, see drawing →	
Video	
 0 798190 133263	 0 798190 133270



Packing Unit: 24 pieces plus one safety punch per packing unit. The punch is made from a special kevlar reinforced plastic. Other packaging units and purchasing sizes available on request.

**Patent:** German Utility Model 20 2016 102 981.3 – European Patent EP 3 446 383 B1 - US-Patent No. US 10,498,049 B2 - EU-Designschutz 006274197-001 - Marken „fiX-E“ (Deutsche Marke 30 2019102 147, internationale Registrierung 1 502 443).

Sales: Q-one Deutschland UG (haftungsbeschränkt), Verdener Str. 46, 28832 Achim, Geschäftsführer B. Hoehne, USt.-Id-Nr. DE284409774, HRB 203618 Walsrode, IBAN: DE72 2915 2670 0020 1696 78, BIC: BRLADE21VER, T. +49 4202 910450